



CSP F3 Aerator Attachment Instructions

500 / 1000 GPM Hydro-Foam Nozzle Upgrade

Model HFAA-B HydroFoam Aerator Attachment

Can be configured to fit most any master stream nozzle

Combat Support Products, Inc.
Carolina Beach, NC.
www.Combat.Support.products.Com

Permanently Attach Mating Ring To Nozzle



Separate mating ring segments.




Fit mating ring segments behind nozzle shaper flange.

Bolt mating rings segments together.



Hex stop - Only nut will turn.


Fastener bolts will face opposite

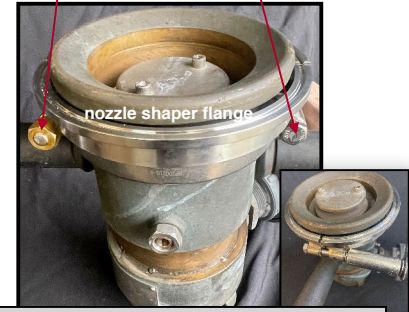

Tighten nuts evenly, just enough to flatten lock washers. Use 5/8" socket.
DO NOT USE IMPACT WRENCH

Stainless steel, 10.5 lb., 22" long. U.L. quality foam with NF Universal F3 Green

Attach Aerator To Nozzle

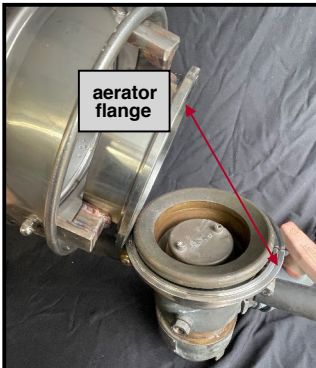

aerator flange

Mounting collar



Attach nozzle flange to aerator flange. Capture both with hinged mounting collar. Snug tight thumb screw. If permanent, use blue lock tight on thumb screw threads.



Adjust foam quality in slightly open to tight straight stream mode.