



Fairfax County Fire Rescue

ALPHA III

July 2019

Twin Foam/Water Firefighting Trailers



Foam Trailer Briefing - © 2019 Combat Support Products, Inc. 910-707-0309



VIN 4C9CFF822KF379020

VIN 4C9CFF822KF379021





ALPHA III

16,000 GVWR


- 21 feet long
- 8'-5" wide
- 7'-6" high
- 4,500 +/- lbs. empty
- 13,200 +/- full tanks
- Torsion axles (2) 8,000 lb.
- Radial, highway rated tires
- Electric brakes (4-wheels)
- NFPA stripes and lights
- Eight-inch frame rails
- 0.25" steel deck
- Eight-inch (ss) plumbing
- 3-330 gal. tote tanks
- Foam plumbing 3" (ss)



Alpha III Options



1. Quad flow foam nozzle: 750-1000-1500-2000 gpm.
2. Automatic nozzle, 300-2000 gpm for cooling, 300 ft. range
3. Two 2000 gpm RF monitors and valves.
4. Two pressure gauges
5. 2.5"/1.5" discharge (4)
6. Six-inch x 4" water inlets (4)
7. 125 gpm hand-line eductor
8. 2.5" Blitzfire eductor (350 gpm)
9. Pressure relief valve on 8" manifold, set at 200 psi (2)
10. Foam transfer valve 2" (3)
11. Transfer pump kit inside
12. Three 330 gal foam tanks w/hi-flo auto vents.
13. Six LED floods and (10) LED warning lights.
14. Eq. storage boxes (3)
15. Portable oscillating Biltzfire foam monitor.
16. Six appliance foam manifold.
17. Seven hour, rechargeable power center -12 volt.
18. 0.25" aluminum sign boards.

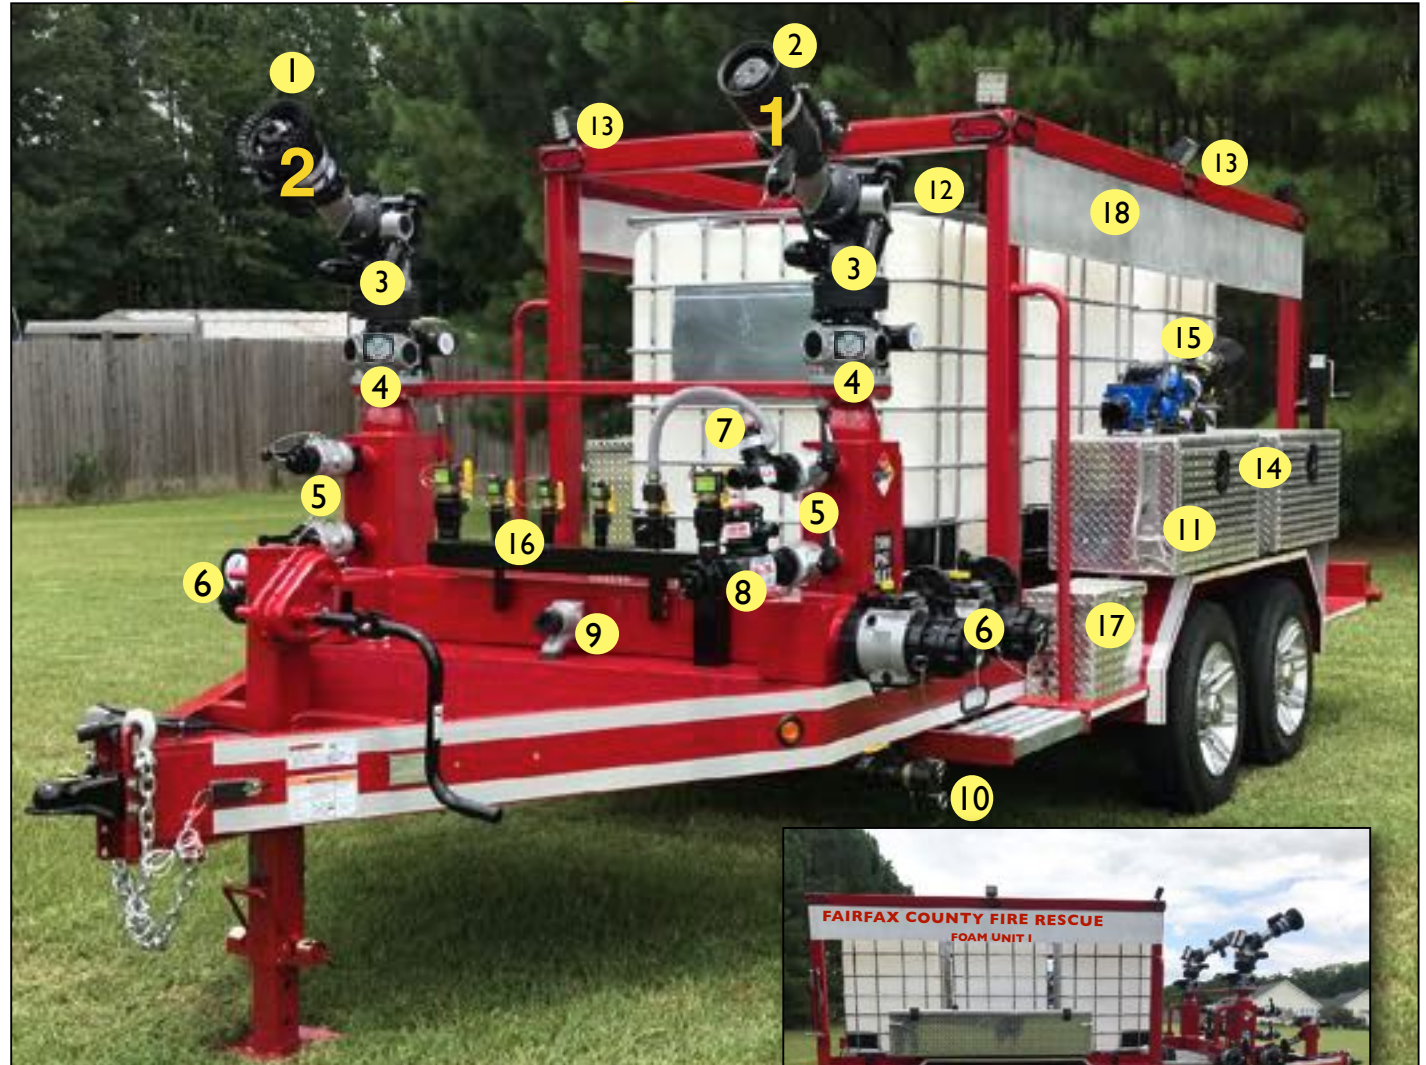

Battery & Power Switches



These switches operate monitor, warning lights, operator's station, step and rear work lights.

Battery charges from tow vehicle and or onboard 120 volt charger/conditioner.



Storage



2 - 36' x 18" x 18"
0.25" walk-on tops

72' x 20" x 16"
0.25" triple hinge
hose cabinet

