

Wilmington Fire Dept. August 2013

Combat Support Products, Model WI419-3
VIN 5E7DHI526DR001747



825 Gallon Triple Tote Foam
Firefighting Trailer

Sunday, August 4, 13

1

Wilmington Fire Department



Nineteen feet long

Eight feet wide

Seven feet high

Torsion axles (2) 7,000 lb.

14,000 GVW

Radial, highway rated tires

Electric brakes (4-wheels)

50 GPM foam transfer pump

NFPA stripes and lights

Eight-inch frame rails

0.25" steel deck

3-275 gal. IBC tote tanks

Five-inch water plumbing

Three-inch foam plumbing

Foam Trailer Training - © 2013 Combat Support Products, Inc. 800-393-4032

Sunday, August 4, 13

2

Firefighting Capabilities

825 gallons, Universal Gold 1x3% AR-AFFF

500 -750 -1000 gpm foam/water nozzle will manage a 10,000 sq. ft. hydrocarbon spill fire or a 5,000 sq. ft. ethanol spill fire.

Time till empty tanks: 27.5 minutes at 3% - 82.5 minutes at 1%.

350 gpm portable ground foam/water monitor will manage a 3,500 sq. ft. hydrocarbon spill fire or a 1,750 sq. ft. ethanol spill fire.

95 gpm foam hand-line will manage a 3,500 sq. ft. hydrocarbon spill fire or a 1,750 sq. ft. ethanol spill fire.




Foam Trailer Training - © 2013 CombatSupportProducts.Com

Sunday, August 4, 13

3

Transferable foam tanks 7500 lb.

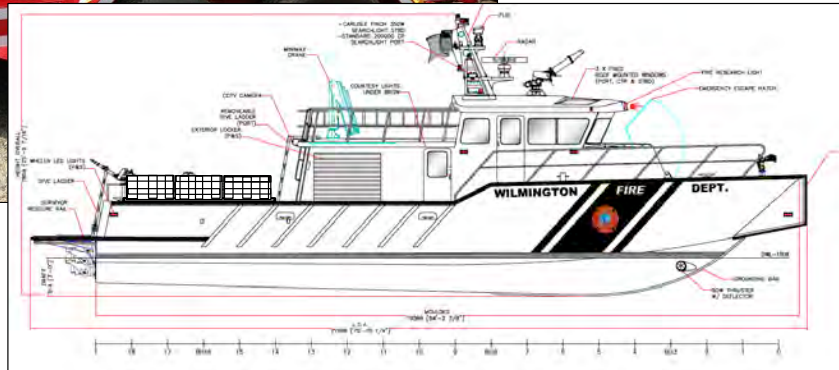

Foam Trailer Training - © 2008 CombatSupportProducts.Com

800-393-4032

Sunday, August 4, 13

4